

## Function

Flush, wall mounted, non-electric hydraulic water level control with built-in level adjustment automatically fills small fountain.

## Specification

Construction shall be cast bronze frame with stainless steel or brass cover and moulded plastic enclosure. Brass and stainless steel fitted with moulded plastic quick fill valve.

## Note

1. Maximum recommended water pressure  
ACX050/ACX051 is 25-30 PSI at 5 GPM.  
ACX100/ACX101 is 35 PSI at 9 GPM.
2. Must be installed with a backflow preventer.
3. W1 dimension is factory set water level.




The cover is offered in:  
Stainless steel and Brass

## Build your Level Controller: Sensors

Sensor Type	Cover Material	P/N
5 GPM	Stainless Steel	ACX050
	Brass	ACX051
9 GPM	Stainless Steel	ACX100
	Brass	ACX101

### Options

Option Type	DESCRIPTION	P/N
Q	Chromed Frame	
V	Vandal Resistant Driver Kit	AWO C70

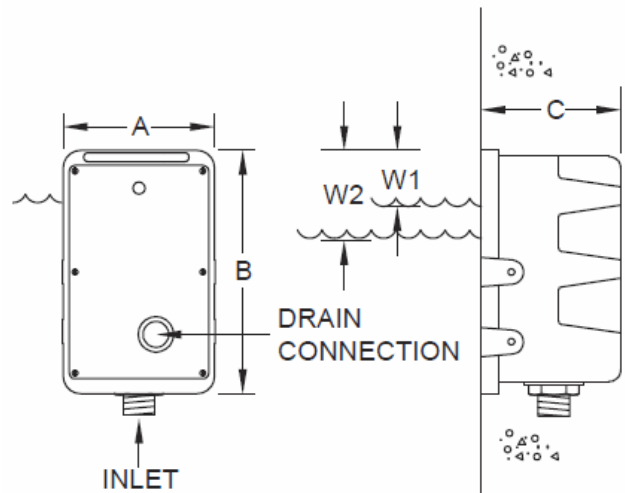

## Dimensions:

Part No.	Inlet Conn. (npt/bsp)	A Dim.	B Dim.	C Dim.	W1 Dim.	W2 Dim.		
ACX050	1/2"	10"	6- 1/2"	5- 3/4"	2- 3/8"	3- 5/8"		
ACX051								
ACX100	1"						2"	3- 1/4"
ACX101								